



Main plate with the twisting mechanism to be attached to the jack tensioning insert.

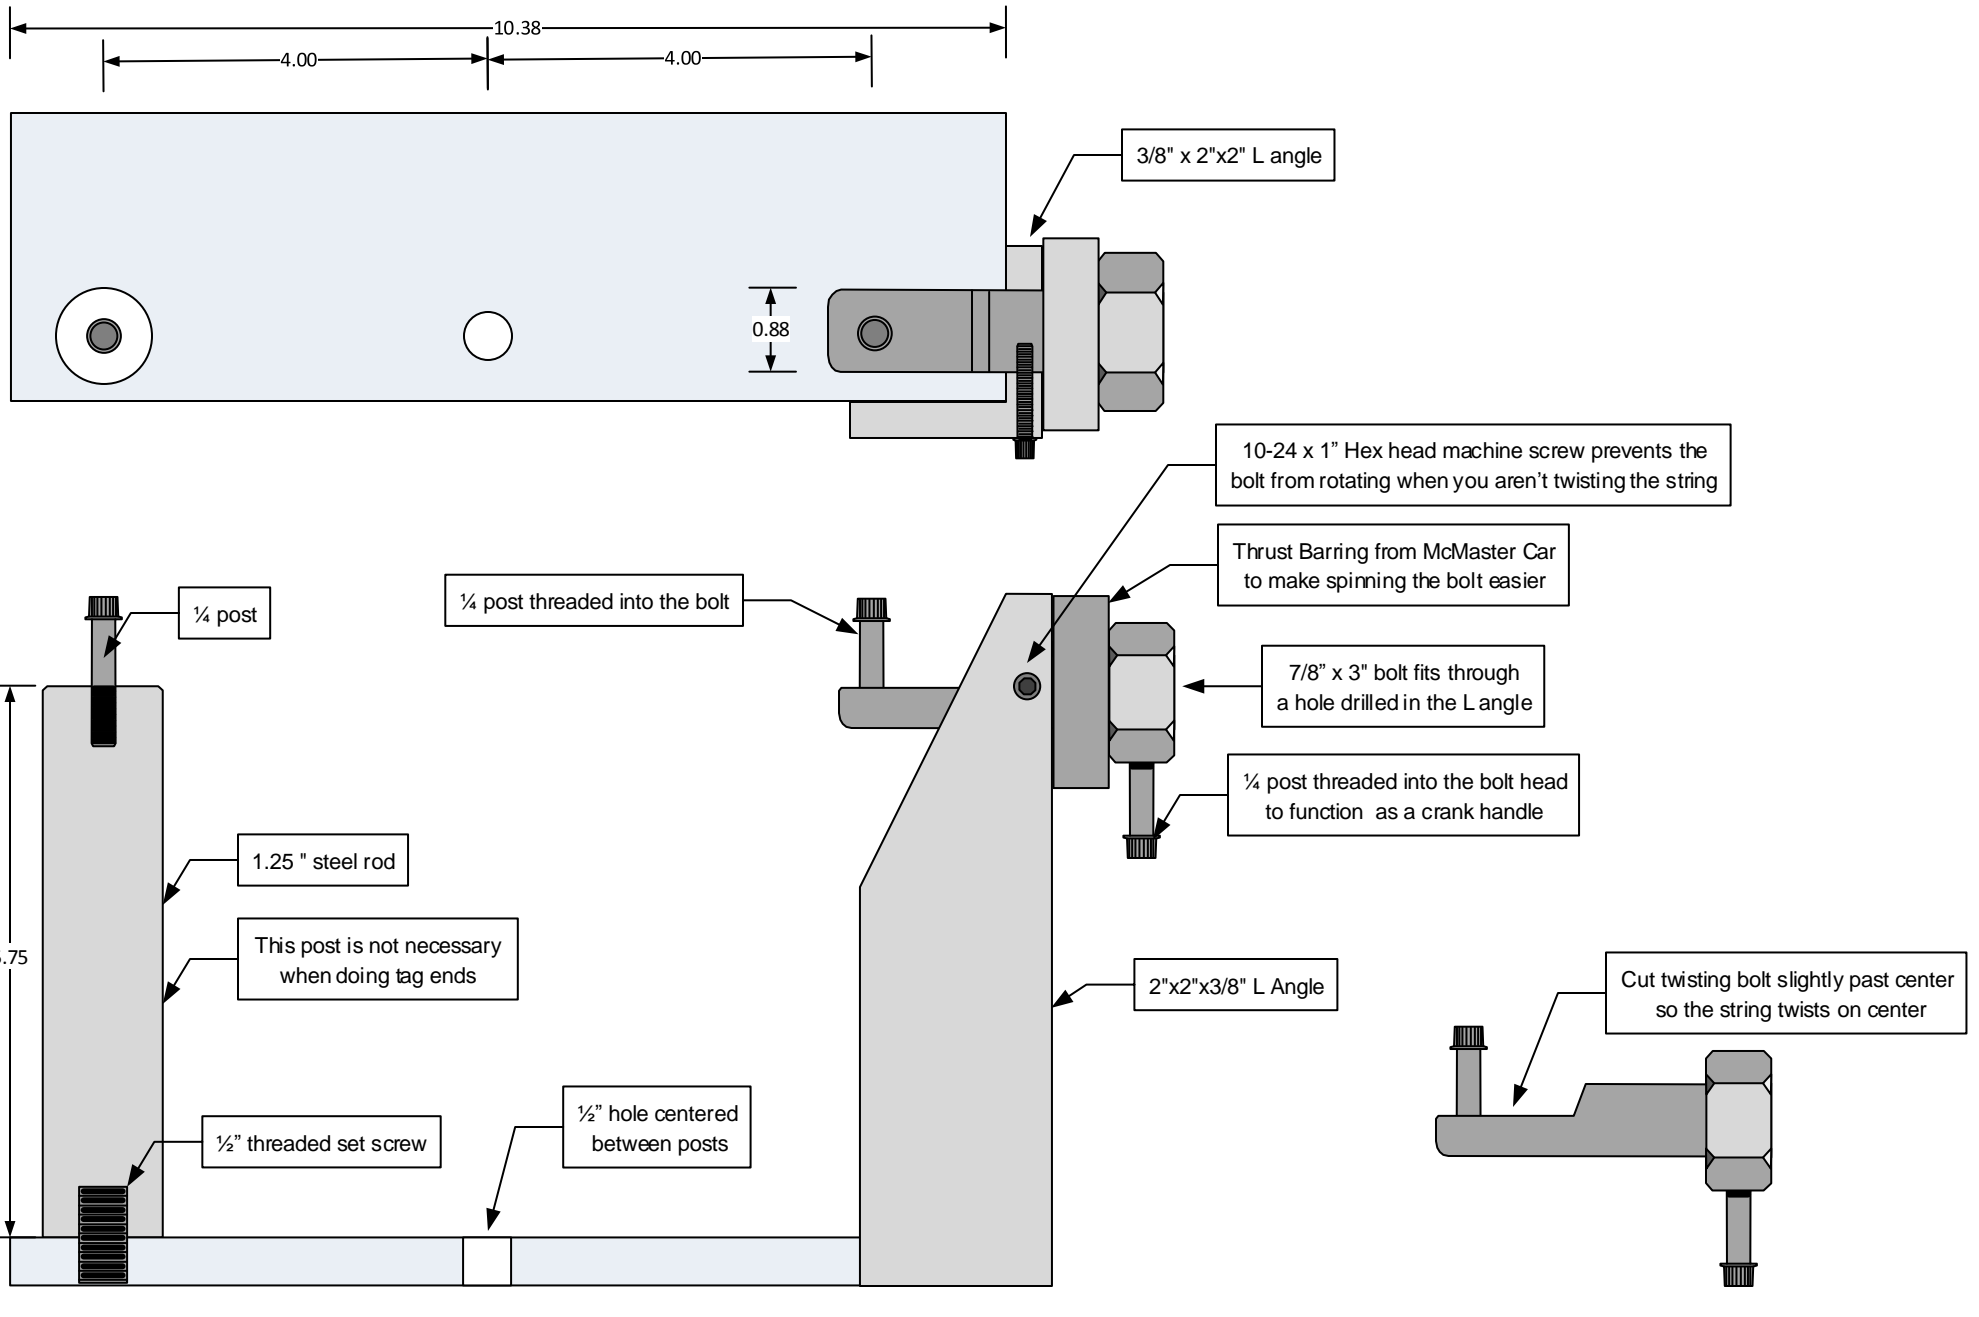

Secondary plate with solid post and removable post.

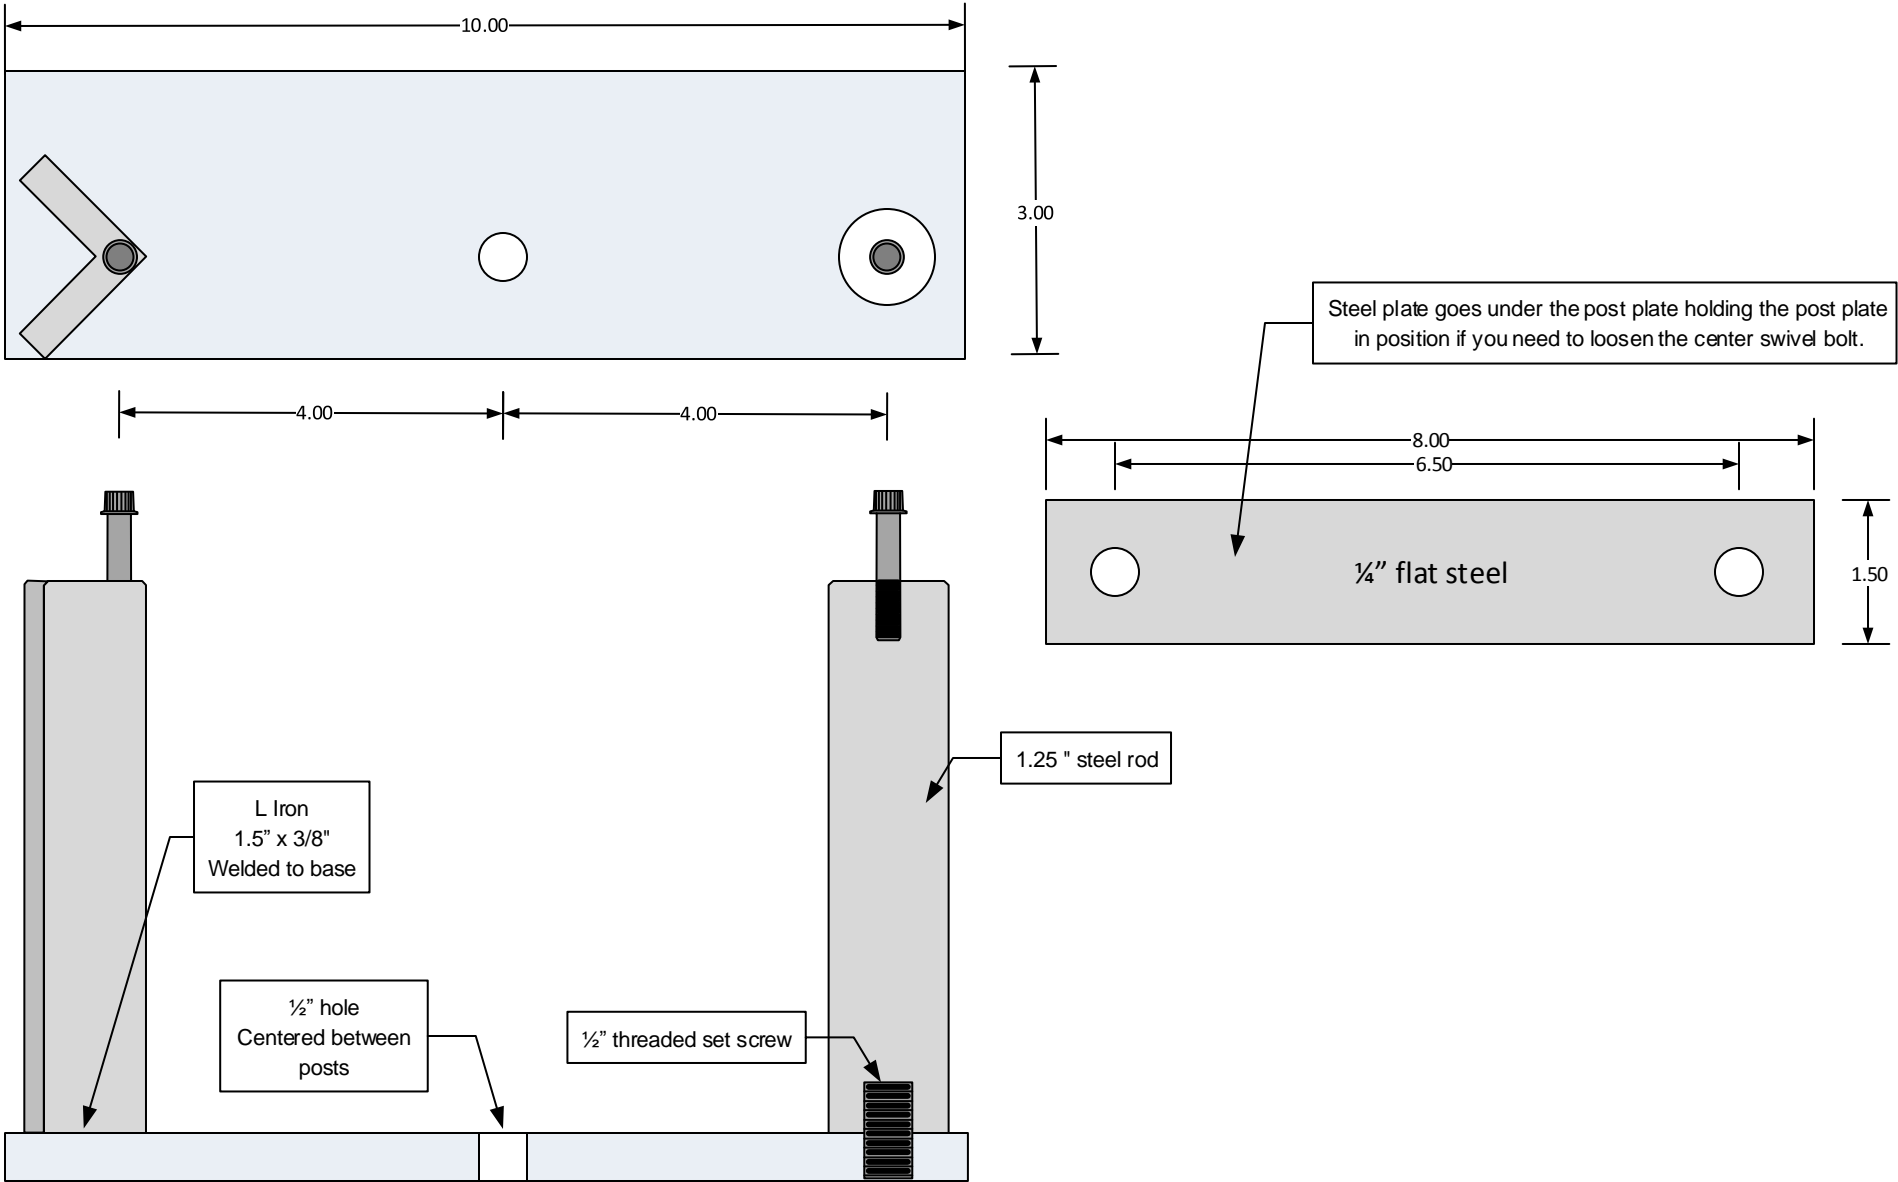

Tensioning insert can be made from the jack base or from scratch

